



Assembly Instructions

The Container Store®

Metro® Commercial Shelving and InterMetro® Shelving

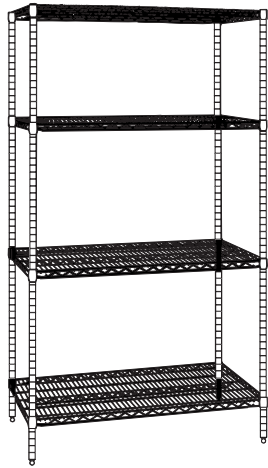


Metro® Commercial Shelving wires
run front to back.

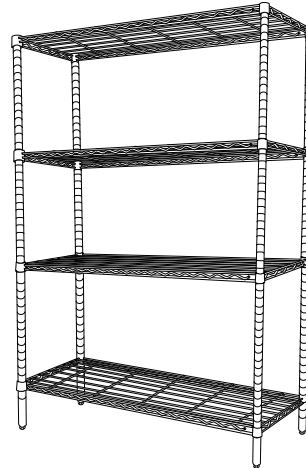


InterMetro® Shelving wires
run side to side.



- 1.** The Posts have grooves at 1" intervals. The 2-piece plastic Sleeves have ridges that fit into the grooves. Choose the desired height of the bottom Shelf and snap a pair of Sleeves onto the Post at the desired height. The beveled end of the Sleeve should be at the top. Repeat for each Post.

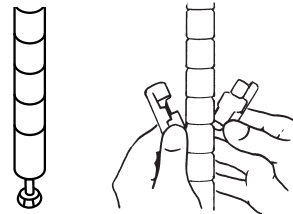

- 2.** Slide one Shelf over the Posts until the Shelf sits securely over the Sleeves.

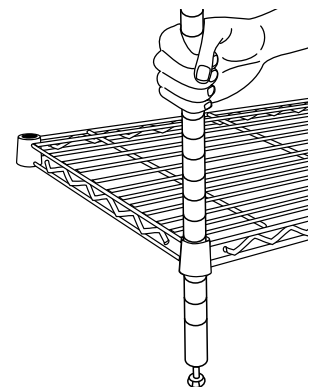

- 3.** Tap the Shelf down in each corner. Repeat for additional Shelves.

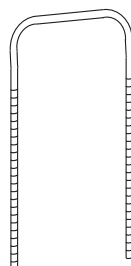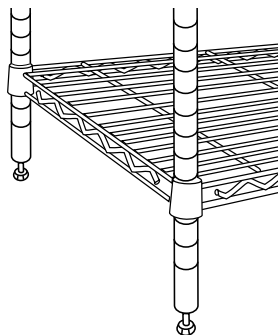

Note: When using the One-Piece Chrome Cart Handles, install top Shelf first. Complete cart by installing the casters last.

Important

- Units over 50" high **must** be assembled with at least three shelves, and preferably four or more.
 - Place shelving on solid and level flooring. Level the unit by adjusting the leveling feet.
 - Install bottom shelf as low as possible.

Metro® Commercial Shelving Load Ratings

Shelves up to 48" long: 800 lbs. per shelf • Shelves over 48" long: 600 lbs. per shelf
Stationary shelving units – 2000 lbs. total • Mobile shelving units – 500 lbs. total

InterMetro® Shelving Load Ratings

Shelves up to 36" long: 500 lbs. per shelf • Shelves over 36" long: 300 lbs. per shelf
Stationary shelving units – 2000 lbs. total • Mobile shelving units – 300 lbs. total

Warning – Tipping Hazard

- Do not climb or stand on shelving.
- Place heavy objects on lowest shelf.
- Distribute weight as evenly as possible.
- Do not drop heavy objects on shelves.
- Use extreme caution when moving a mobile unit.

Failure to follow these instructions could result in personal and/or property damage.